


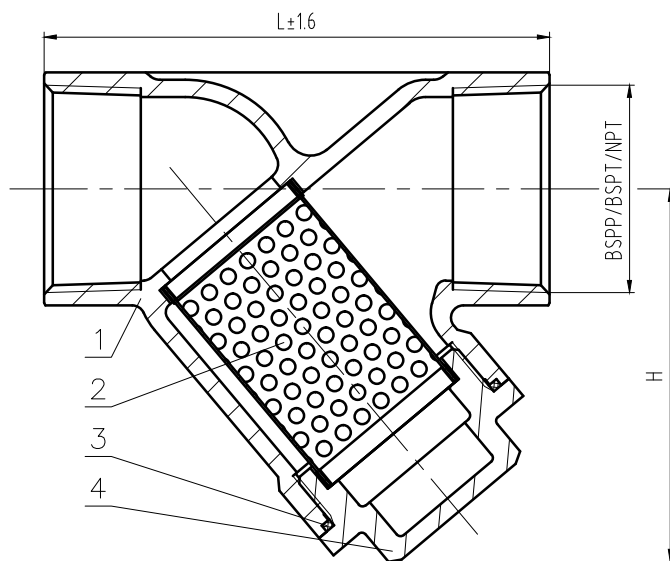

Nominal pressure				800psi			
Test pressure	Shell test	8.3	Mpa	Test medium	Water	Test temperature	Normal temperature
	Seal test	6.1					
	Gas seal test	0.6			Air		
Applicable medium		Water,Oil,Gas					
Applicable temperature		-29~180℃					

NOTE:

- 1.Design and Manufacture for valve according to ASME B16.34.
- 2.Inspection and Test for valve according to API 598.
- 3.The connection of screwed for valve according to ISO 7/1 or ANSI B1.20.1.

	L	BSPP/BSPT/NPT	H
DN15	63	1/2	47
DN20	75	3/4	57
DN25	89	1	66
DN32	102	1¼	75
DN40	116	1½	88
DN50	138	2	101
DN65	180	2½	120
DN80	200	3	135

4	BONNET	1	A351 CF8	A351 CF8M
3	GASKET	1	RPTFE	RPTFE
2	SCREEN MESH	1	SS304	SS316
1	BODY	1	A351 CF8	A351 CF8M
NO.	DESCRIPTION	QTY	MATERIAL	
			A6YS1	A6YS2
			GENERAL DRAWING	
MARK	BEFORE MODIFIED	AFTER MODIFIED	DATE	Y-STRAINER
DRA.		APP.		
CHK.		DATE		A6YS1/YS2