


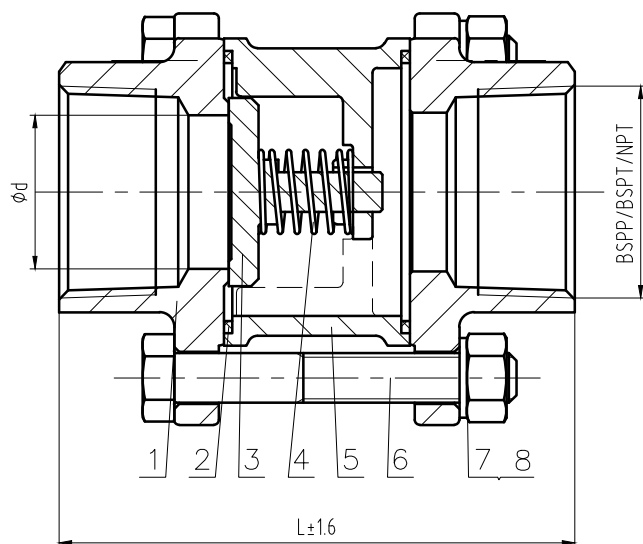

	L	d	BSPP/BSPT/NPT
DN8	75	11	1/4
DN10	75	11	3/8
DN15	75	14	1/2
DN20	80	19	3/4
DN25	86	24	1
DN32	104	31	1¼
DN40	115	39	1½
DN50	122	49	2

Nominal pressure				4.0MPa			
Test pressure	Shell test	6	Mpa	Test medium	Water	Test temperature	Normal temperature
	Seal test	4.4					
	Gas seal test	0.6			Air		
Applicable medium			Water,Oil,Gas				
Applicable temperature			-29~180℃				

NOTE:

- 1.Design and Manufacture for valve according to ASME B16.34.
- 2.Inspection and Test for valve according to API 598.
- 3.The connection of screwed for valve according to ISO 7/1 or ANSI B1.20.1.

8	NUT	-	A194 8M			
7	SPRING WASHER	-	SS304			
6	HEXAGON HEAD BOLT	-	A193 B8M			
5	BONNET	1	A351 CF8M			
4	GASKET	1	RPTFE			
3	SPRING	1	SS316			
2	DISC	1	A351 CF8M			
1	BODY	1	A351 CF8M			
NO.	DESCRIPTION		QTY	AT513		
				MATERIAL		
				GENERAL DRAWING		
MARK	BEFORE MODIFIED	AFTER MODIFIED	DATE	3PC SCREWED END		
DRA.		APP.			SCALE	CHECK VALVE
CHK.		DATE				AT513