

GP General Purpose Valve - Series GPW SS316



Compatible Fluids:


Air, Inert Gases, Water, Hydraulic Fluids,
Petroleum Products and additional fluids
compatible with materials of construction

Installation:

The valves can be mounted in any position. It is
however recommended to install them with the
coil in vertical position above the body.

Notes:

We recommend to install a strainer or filter before
the valve if fluid is contaminated

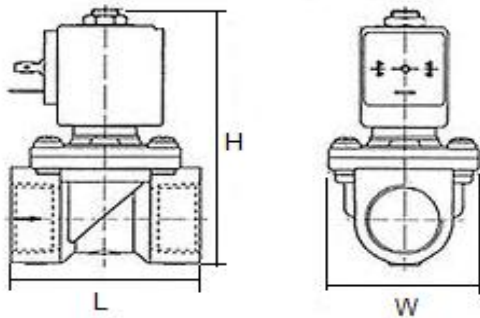

2/2-way Forced Lifting, Normally Closed

Function:

Non-energised closed by spring power (NC)

When energised, the plunger opens the pilot orifice,
relieving pressure from the top of the diaphragm via the outlet
side of the valve. The line pressure then opens the valve
by lifting the diaphragm off the main orifice.

Body Material: Stainless Steel SUS316

Sealing Material: VITON

Pressure Range: 0~10bar

Fluid Temperature:

VITON 110° C

Ambient 50° C

Enclosure: DIN43650A, IP65

Voltage Available:

AC 24, 48, 110, 240V 50Hz

DC 12, 24V=

Tolerance +/- 10%

Power Consumption DIN COIL:

AB410 AC-22VA, DC-18W

AB510 AC-28VA, DC-24W

DIN 43650A coil (IP65):

Solenoid coil is fitted with LED plug + varistor (VDR) to
protect supply switch from inductive voltage spikes,
and protect coil from burn-out.

Port Size G	Orifice (mm)	Part Number	Cv Value	Pressure Differential (bar)			Dimensions		
				Min	Max		L (mm)	W (mm)	H (mm)
					AC	DC			
1/2	15	GPW-50S6	4.8	0	10	10	60	45	111
3/4	20		7.6	0	10	10	62	50	117
1	25		12	0	10	10	82	66	124
1 1/4	32		24	0	7	7	102	82	156
1 1/2	40		29	0	7	7	110	85	161
2	50		48	0	7	7	134	108	176

Options:

All technical specifications are without obligation!

- Viton sealing suitable for gas, oil, hot water, acid, alkali, chemical salt, hydrocarbon up to max 110° C