

TANK BOTTOM BALL VALVE




● Application

- Application for Tank Draining
- Fit for Tank Flange

● Specification

Valve Size	25A ~ 150A		
Actuator Model	ATBB- Series		
Actuator Type	Double Acting & Single Acting(Spring Return)		
Operating Media	Compressed Dry Air		
Operating Pressure	4 ~ 7kg/cm ² & 4.5 ~ 7kg/cm ²		
Fluid Temperature	-10℃~ 110℃		
Rating	JIS 10K	ANSI 150#	
Option	Tank Bottom Assemble Flanged, Ferrule Type End, Screwed Type End		
Material	SCS13(SCS14)/Body	SCS13(SCS14)/Ball	PTFE/SEAT
Accessory	Solenoid Valve, Limit Switch Box, Air Filter & Regulator, Speed Controller, E/P Positioner, Manual Handle		

※ () Option

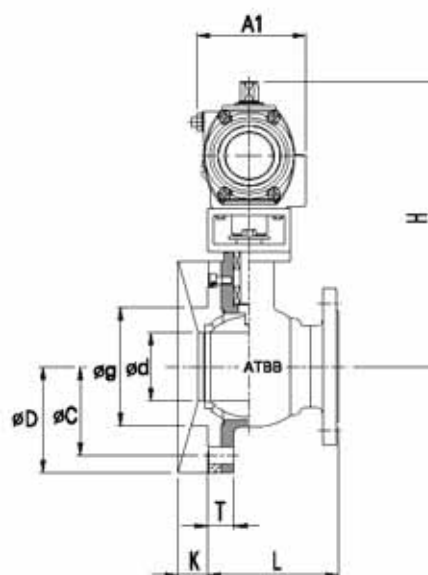

● Dimension

mm

Model	A1	H (APPROX.)	L	K	TANK PAD CONNECTION(MAKER STANDARD)					
					T	ød	øg	øC	øD	N-øH
ATBB50-25F	75	235	93	28.5	25	25	49	105	140	4-15
ATBB65-40F	89	289	109	29	25	40	61	120	155	4-15
ATBB65-50F	89	302	124	32	28	50	77	140	175	4-15
ATBB80-65F	101	331	131	37	30	65	102	160	195	6-15
ATBB80-80F	101	351	153	45	32	80	140	210	250	6-19
ATBB100-100F	129	383	170	62.5	35	100	166	240	280	8-19
ATBB125-125F	151	450	254	62.5	43	125	192	265	305	8-19
ATBB140-150F	164	516	277	62.5	45	150	243	310	350	8-23