





DESCRIPTION:

AUTOMA Swing Check Valve is a device that allows fluids to flow through in only one direction. It is designed to prevent backflow of fluids for example when the pump is shut-off. It can be installed in horizontal or vertical positions in the piping system.

- Hot water and steam

Typical installation of Swing Check Valve and Y-Strainer to prevent backflow of liquid and dirts into pump

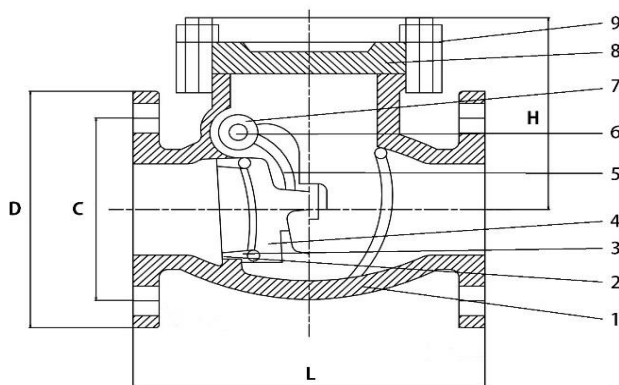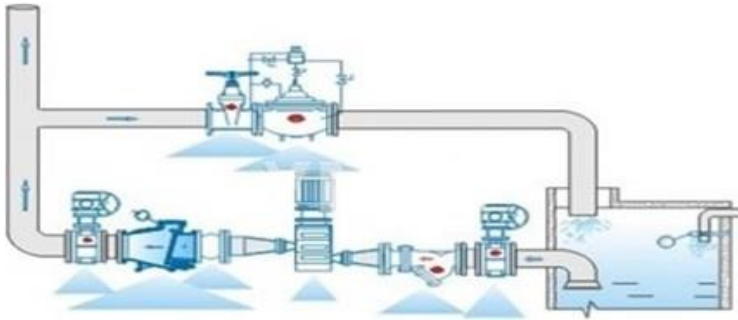

MATERIAL LIST:

PART NAME	MATERIAL
1. Body	Cast iron
2. Seat ring	Stainless steel 13%Cr
3. Disc ring	Stainless steel 13%Cr
4. Disc	Cast iron
5. Hinge	Stainless steel 13%Cr
6. Hinge pin	Carbon steel
7. Plug	Carbon steel
8. Gasket	Graphite
8. Bonnet	Cast iron

DIMENSIONS (mm):

SIZE	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"
DN	50	65	80	100	125	150	200	250	300
L	206	213	240	292	330	355	495	622	698
H	112	127	140	154	186	208	240	283	320
D	155	175	185	210	250	280	330	400	445
C	120	140	150	175	210	240	290	355	400

The specification and dimensions are subject to change without prior notice!